

Descriptions

- Switching application
- Interface circuit and driver circuit application

Features


- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

Ordering Information

Type NO.	Marking	Package Code
KRC1219	KRC1219•	TO-92

•Dalian

PIN Connection

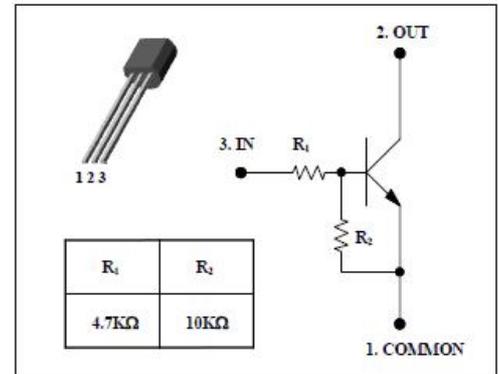

Absolute Maximum Ratings

T_a=25°C

Characteristic	Symbol	Ratings	Unit
Output voltage	V _o	50	V
Input voltage	V _I	20, 7	V
Output current	I _o	100	mA
Power dissipation	P _D	625	mW
Junction temperature	T _J	150	°C
Storage temperature range	T _{stg}	-55~150	°C

Electrical Characteristics

T_a=25°C

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output cut-off current	I _{O(OFF)}	V _o =50V, V _I =0	-	-	500	nA
DC current gain	G _I	V _o =5V, I _o =-10mA	30	-	-	-
Output voltage	V _{O(ON)}	I _o =10mA, I _I =0.5mA	-	0.1	0.3	V
Input voltage (ON)	V _{I(ON)}	V _o =0.2V, I _o =5mA	-	1.2	1.6	V
Input voltage (OFF)	V _{I(OFF)}	V _o =5V, I _o =0.1mA	0.5	0.82	-	V
Transition frequency	f _T *	V _o =10V, I _o =5mA, f=1MHz	-	200	-	MHz
Input current	I _I	V _I =5V, I _o =0	-	-	1.8	mA
Input resistor (Input to base)	R ₁	-	3.3	4.7	6.1	KΩ
Input resistor (Base to common)	R ₂	-	7	10	13	KΩ

* : Characteristic of transistor only

Electrical Characteristic Curves

Fig. 1 $P_D - T_a$

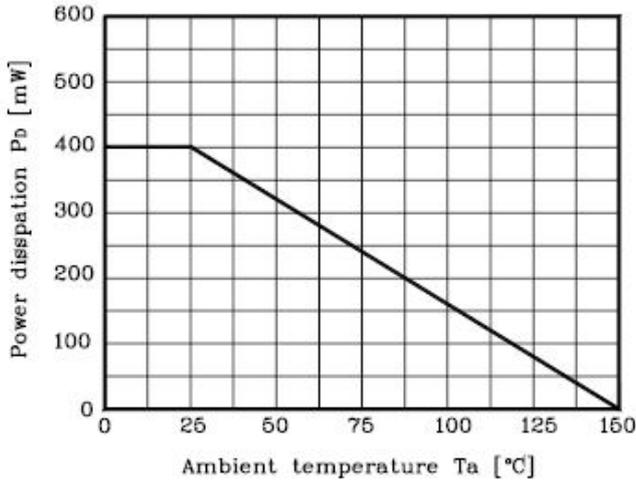


Fig. 2 $I_O - V_{I(ON)}$

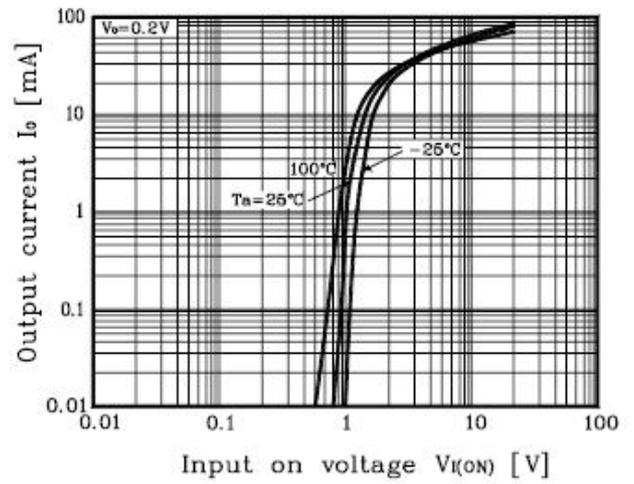


Fig. 3 $I_O - V_{I(OFF)}$



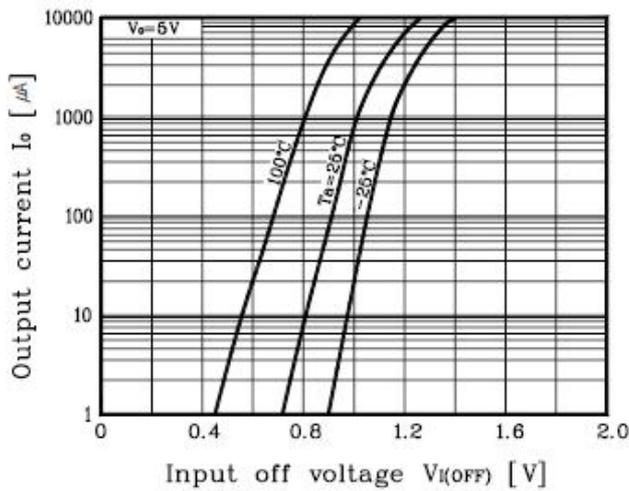


Fig. 4 $G_I - I_O$

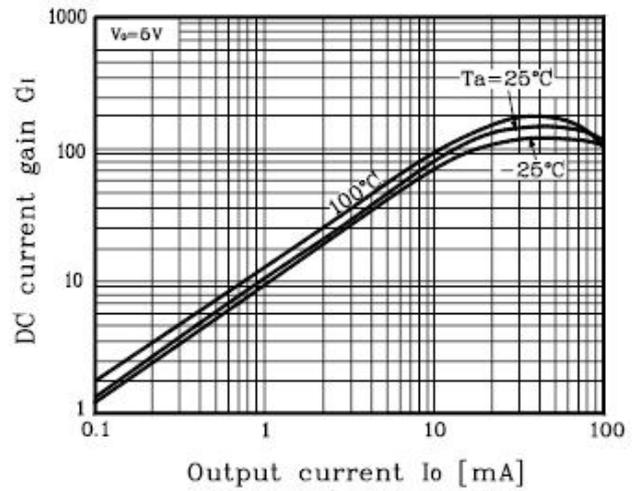

Outline Dimension

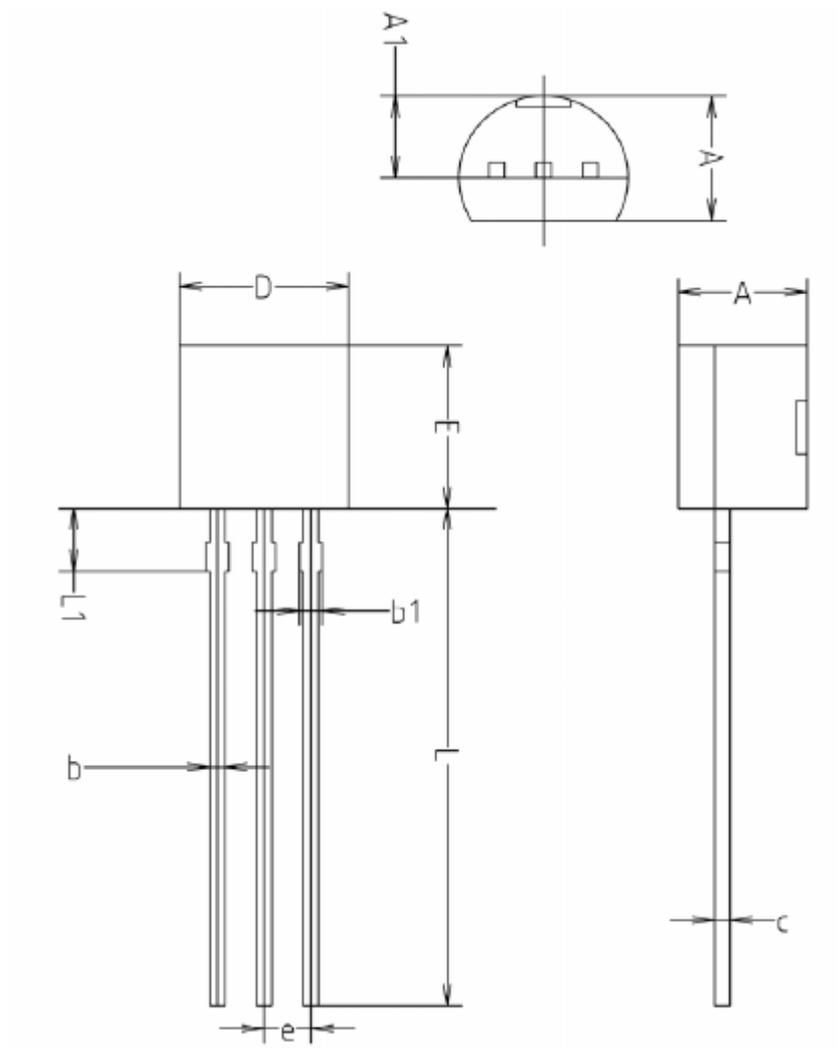

SYMBOL	MILLIMETERS(mm)		
	MINIMUM	NOMINAL	MAXIMUM
A	3.40	3.50	3.66
A1	2.46	2.51	2.59
b	0.39	0.44	0.53
b1	0.39	—	0.63
c	0.35	0.42	0.47
D	4.48	4.60	4.70
E	4.48	4.60	4.70
e	1.17	1.27	1.37
L	13.70	14.00	14.77
L1	1.55	1.70	2.15

The AUK Dalian Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Dalian Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Dalian Corp. cannot accept liability to any damage which may occur in case these AUK Dalian Corp. products were used in the mentioned equipments without prior consultation with AUK Dalian Corp..

Specifications mentioned in this publication are subject to change without notice.