

RLH

Radial Lead Type
series

- Higher temperature endurance guaranteed than RL series
- Super low ESR, High ripple current
- Large capacitance, Small size
- Load life of 1,000h at 125°C



Br C1
Halogen Less



SPECIFICATIONS

Items	Characteristics	
Temperature range	-55 to +125°C	
Rated voltage range	2.5 to 16Vdc	
Capacitance range	100 to 3,500μF	
Capacitance tolerance	±20% [M] (at 20°C, 120Hz)	
Tangent of loss angle	Less than or equal to the value of Standard Ratings (at 20°C, 120Hz)	
Leakage current	Less than or equal to the value of Standard Ratings (at 20°C, after 2 minutes)	
ESR	Less than or equal to the value of Standard Ratings	
Characteristics of impedance	Z _{+125°C} /Z _{+20°C} ≤ 1.25, Z _{-55°C} /Z _{+20°C} ≤ 1.25 at 100kHz	
Endurance	125°C, 1,000 hrs at rated voltage	
	Appearance	No significant damage
	Capacitance change	Within±20% of the initial value
	Tangent of loss angle (tanδ)	≤150% of the initial specified value
	ESR(mΩ)	≤150% of the initial specified value
Damp Heat (Steady State)	Leakage current	≤The initial specified value
	60°C , 90 to 95% RH , 1,000 hrs , No-applied Voltage	
	Appearance	No significant damage
	Capacitance change	Within±20% of the initial value
	Tangent of loss angle (tanδ)	≤150% of the initial specified value
	ESR(mΩ)	≤150% of the initial specified value
Resistance to soldering heat	Leakage current	≤The initial specified value
	Flow method (260±5°C, 10s)	
	Appearance	No significant damage
	Capacitance change	Within±10% of the initial value
	Tangent of loss angle (tanδ)	≤130% of the initial specified value
	ESR(mΩ)	≤130% of the initial specified value
Resistance to soldering heat	Leakage current	≤The initial specified value
	Flow method (260±5°C, 10s)	
	Appearance	No significant damage
	Capacitance change	Within±10% of the initial value
	Tangent of loss angle (tanδ)	≤130% of the initial specified value
	ESR(mΩ)	≤130% of the initial specified value


*In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 125°C

SIZE LIST

(unit : mm)

μF	RV(SV)	2.5 (3.3)	4 (5.2)	6.3 (8.2)	10 (11.5)	16 (18.4)
100					6.3 x 6 6.3 x 9	
150				6.3 x 6	8 x 7	
180					8 x 9 8 x 11.5	
220		5 x 9		6.3 x 6		8 x 7
270					8 x 7	8 x 9 8 x 11.5
330		5 x 9 6.3 x 9				8 x 9 8 x 11.5
470		5 x 9		6.3 x 9 8 x 9 8 x 11.5		10 x 11.5
560		5 x 9 6.3 x 9 8 x 9	6.3 x 9 8 x 9 8 x 11.5	6.3 x 9 8 x 9		
680			8 x 11.5	10 x 11.5		
820		6.3 x 9 8 x 7 8 x 9 8 x 11.5	10 x 11.5	8 x 9 8 x 11.5		
1000		8 x 9 10 x 11.5				
1200			8 x 9			
1500		8 x 9		10 x 11.5		
2700		10 x 11.5				
3500		10 x 11.5				

MARKING AND DIMENSIONS

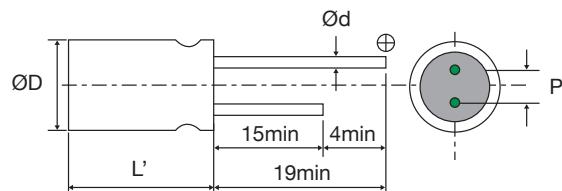

Size	$\phi D \pm 0.5$	L	L'	P ± 0.5	ϕd
5 x 9	5.0	9.0		2.0	0.6
6.3 x 6	6.3	6.0		2.5	0.45
8 x 7	8.0	7.0	L max.	3.5	0.45
6.3 x 9	6.3	9.0		2.5	0.6
8 x 9	8.0	9.0		3.5	0.6
8 x 11.5	8.0	11.5	L+1.0max.	3.5	0.6
10 x 11.5	10.0	11.5		5.0	0.6

*RV : Rated Voltage [V] SV : Surge Voltage [V] (at room temperature)

Conductive Polymer Aluminum Capacitors

STANDARD RATINGS

Rated Voltage [Vdc]	Rated Capacitance [μ F]	Size $\Phi D \times L$ [mm]	ESR (20°C, 100kHz) [$m\Omega$] [max.]	Rated Ripple Current (100kHz)[mArms]		Tangent of Loss Angle [max.]	Leakage Current [μ A, max.]	Part Number
				-55 to +105°C	+105 to +125°C			
2.5	220	5 x 9	7	4180	1323	0.10	500	2RLH220MB9
	330	5 x 9	7	4180	1323	0.10	500	2RLH330MB9
	330	6.3 x 9	7	5600	1772	0.10	500	2RLH330MC9
	470	5 x 9	7	4180	1323	0.10	500	2RLH470MB9
	560	5 x 9	7	4180	1323	0.10	500	2RLH560MB9
	560	6.3 x 9	7	5600	1772	0.10	500	2RLH560MC9
	560	8 x 9	7	6100	1930	0.10	500	2RLH560MD9
	820	6.3 x 9	7	5600	1772	0.10	500	2RLH820MC9
	820	8 x 7	8	5300	1677	0.10	500	2RLH820MD7
	820	8 x 9	7	6100	1930	0.10	500	2RLH820MD9
	820	8 x 11.5	7	6100	1930	0.10	500	2RLH820MD11
	1000	8 x 9	7	6100	1930	0.10	500	2RLH1000MD9
	1500	8 x 9	7	6100	1930	0.10	750	2RLH1500MD9
	2700	10 x 11.5	10	5560	1759	0.10	1350	2RLH2700ME11
	3500	10 x 11.5	10	5560	1759	0.10	1750	2RLH3500ME11
4	560	6.3 x 9	7	5600	1772	0.10	500	4RLH560MC9
	560	8 x 9	7	6100	1930	0.10	500	4RLH560MD9
	560	8 x 11.5	7	6100	1930	0.10	500	4RLH560MD11
	680	8 x 11.5	7	6100	1930	0.10	544	4RLH680MD11
	820	10 x 11.5	7	6640	2101	0.10	656	4RLH820ME11
	1000	8 x 9	7	6100	1930	0.10	800	4RLH1000MD9
	1000	10 x 11.5	7	6640	2101	0.10	800	4RLH1000ME11
	1200	8 x 9	7	6100	1930	0.10	960	4RLH1200MD9
	220	6.3 x 6	18	2980	943	0.10	277	6RLH220MC6
	470	6.3 x 9	7	5600	1772	0.10	592	6RLH470MC9
6.3	470	8 x 9	7	5700	1803	0.10	592	6RLH470MD9
	470	8 x 11.5	7	5700	1803	0.10	592	6RLH470MD11
	560	6.3 x 9	7	5600	1772	0.10	705	6RLH560MC9
	560	8 x 9	7	5700	1803	0.10	705	6RLH560MD9
	680	10 x 11.5	7	6640	2101	0.10	857	6RLH680ME11
	820	8 x 9	7	5700	1803	0.10	1033	6RLH820MD9
	820	8 x 11.5	7	5700	1803	0.10	1033	6RLH820MD11
	1500	10 x 11.5	10	5560	1759	0.10	1890	6RLH1500ME11
	150	6.3 x 6	26	2400	759	0.10	300	10RLH150MC6
	270	8 x 7	22	3220	1019	0.10	500	10RLH270MD7
16	100	6.3 x 6	24	2490	788	0.10	100	16RLH100MC6
	100	6.3 x 9	10	4680	1481	0.10	100	16RLH100MC9
	150	8 x 7	22	3220	1019	0.10	150	16RLH150MD7
	180	8 x 9	10	5000	1582	0.10	180	16RLH180MD9
	180	8 x 11.5	16	4360	1380	0.10	180	16RLH180MD11
	220	8 x 7	13	4150	1313	0.10	220	16RLH220MD7
	270	8 x 9	10	5000	1582	0.10	270	16RLH270MD9
	270	8 x 11.5	11	5000	1582	0.10	270	16RLH270MD11
	330	8 x 9	11	4520	1430	0.10	330	16RLH330MD9
	330	8 x 11.5	11	5000	1582	0.10	330	16RLH330MD11
	470	10 x 11.5	10	6100	1930	0.10	470	16RLH470ME11



EneCap™